




HCS UP SERIES

Combi cutters





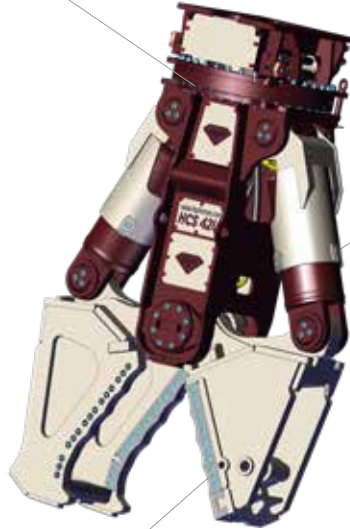




Continuous hydraulic rotation

Integrated high speed valve



Reverse cylinder

Reversible & adjustable blades

COMBI CUTTERS			HCS-19UP	HCS-32UP	HCS-42UP	HCS-52UP	HCS-72UP	HCS-110UP
	Excavator class ¹	t	18 - 25	24 - 37	32 - 50	42 - 62	52 - 86	86 - 150
	Weight	kg	2130	3140	4180	5600	7780	12850
	Jaw opening	mm	400	550	760	830	920	1380
	Cutter length	mm	520	590	740	780	820	1080
	Working pressure	bar	350	350	350	350	350	350
	Oilflow	l/min	150 - 250	200 - 300	220 - 350	350 - 500	500 - 600	500 - 800
	Working pressure rotation	bar	140	140	140	140	140	140
	Oilflow rotation	l/min	10	10	10	30	50	50
	Open/close	sec.	1.5 / 1.6	2.7 / 3.0	2.8 / 3.0	3.1 / 3.5	3.7 / 3.7	3.8 / 3.9

¹ Recommended excavator / attachment combination
Equipped with replaceable teeth

